RIGO P36

INSTALLATION without interruptions

RIGO consists of precision-cut ledge stones molded into panels measuring 11,4 cm x 61 cm, assembled into tightly stacked ledge pieces with varying surface heights and lengths. The panel stair-stepped edges create a tight fit, eliminating unsightly vertical joints. Beveled backsides keep mortar contained for a cleaner and tighter dry-stack installation.




RIGO ACCESSORY

LISTELLO P36-L


The Rigo's LISTELLO connects flat panels in case a gap is too small to be fit with full panels.

LISTELLO is used ONLY in uninterrupted rows of panels running between two Rigo corners (for ex. between windows, doors, etc.)


MINIMUM ORDER LISTELLO PIECES: full box. DRY-STACK INSTALLATION ONLY

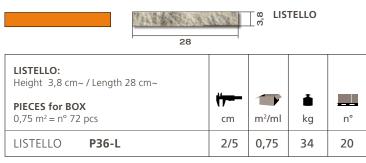

WHITE MELANGE
ZM ZINC MELANGE

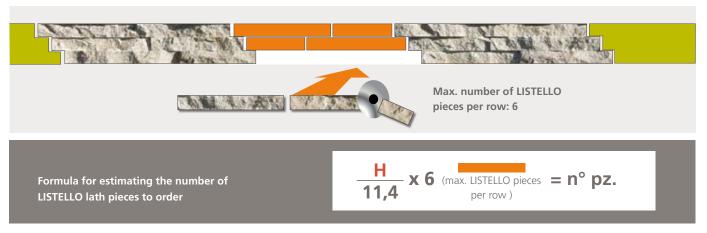

H Height (in cm) of wall between RIGO CORNERS / 11,4 Height (in cm) of the flat RIGO PANEL / 6 Max. number of LISTELLO RIGO pieces per row.

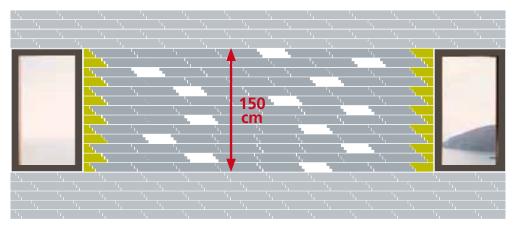

You can proceed as follows:

Install CORNER PIECES first. Install FLAT PANELS along the row from both sides. Run full panels until a gap is too small to fit a full panel. Fill in the remaining gap with the Rigo LISTELLO pieces.

EXAMPLE: